

## Ordering method

| Model | Lead                         | Type        | Brake                             | Direction of air coupler installation | Origin position                  | Stroke                    | Cable length                           |
|-------|------------------------------|-------------|-----------------------------------|---------------------------------------|----------------------------------|---------------------------|--|
| SSC04 | 12: 12mm<br>6: 6mm<br>2: 2mm | S: Straight | N: With no brake<br>B: With brake | RJ: Right (Standard)<br>LJ: Left      | N: Standard<br>Z: Non-motor side | 50 to 400<br>(50mm pitch) | 1L: 1m<br>3L: 3m<br>5L: 5m<br>10L: 10m |

| S2                            | I/O   |
|-------------------------------|---|
| Robot positioner<br>S2: TS-S2 | NP: NPN<br>PN: PNP<br>CC: CC-Link<br>DN: DeviceNet™<br>EP: EtherNet/IP™<br>PT: PROFINET<br>GW: No I/O board |
| SH                            | Battery   |
| Robot positioner<br>SH: TS-SH | NP: NPN<br>PN: PNP<br>CC: CC-Link<br>DN: DeviceNet™<br>EP: EtherNet/IP™<br>PT: PROFINET<br>GW: No I/O board |
| SD                            | 1   |
| Robot driver<br>SD: TS-SD     | I/O cable<br>1: 1m  |

Note 1. If changing from the origin position at the time of purchase, the machine reference amount must be reset. For details, refer to the manual.

Note 2. The robot cable is flexible and resists bending.

Note 3. See P.522 for DIN rail mounting bracket.

Note 4. Select this selection when using the gateway function. For details, see P.66.


## Basic specifications

|  |  |
|--|--|
| Motor  | 42 □ Step motor                                  |
| Repeatability (mm)                                   | +/-0.02  |
| Deceleration mechanism                               | Ball screw φ8                                    |
| Maximum motor torque (N·m)                           | 0.27   |
| Ball screw lead (mm)                                 | 12    6    2                                     |
| Maximum speed (mm/sec)                               | 600    300    100                                |
| Maximum payload (kg)                                 | Horizontal: 2    4    6<br>Vertical: 1    2    4 |
| Max. pressing force (N)                              | 45    90    150                                  |
| Stroke (mm)  | 50 to 400 (50mm pitch)                           |
| Overall length (mm)                                  | Horizontal: Stroke+216<br>Vertical: Stroke+261   |
| Maximum outside dimension of body cross-section (mm) | W49 × H59  |
| Cable length (m)                                     | Standard: 1 / Option: 3, 5, 10                   |
| Degree of cleanliness                                | CLASS 10   |
| Intake air (Nl/min)                                  | Lead 12: 50    Lead 6: 30    Lead 2: 15          |


Note 1. Positioning repeatability in one direction.

Note 2. Per 1cf (0.1µm base), when suction blower is used.


## Allowable overhang



| Horizontal installation (Unit: mm) |         |     |     |
|------------------------------------|---------|-----|-----|
|                                    | A       | B   | C   |
| Lead 12                            | 1kg 807 | 218 | 292 |
| Lead 6                             | 2kg 667 | 107 | 152 |
| Lead 2                             | 2kg 687 | 116 | 169 |
| Lead 6                             | 3kg 556 | 76  | 112 |
| Lead 2                             | 4kg 567 | 56  | 84  |
| Lead 2                             | 4kg 869 | 61  | 92  |
| Lead 2                             | 6kg 863 | 40  | 60  |




| Wall installation (Unit: mm) |         |     |     |
|------------------------------|---------|-----|-----|
|                              | A       | B   | C   |
| Lead 12                      | 1kg 274 | 204 | 776 |
| Lead 6                       | 2kg 133 | 93  | 611 |
| Lead 2                       | 2kg 149 | 102 | 656 |
| Lead 6                       | 3kg 92  | 62  | 516 |
| Lead 2                       | 4kg 63  | 43  | 507 |
| Lead 2                       | 4kg 72  | 48  | 829 |
| Lead 2                       | 6kg 39  | 29  | 789 |



| Vertical installation (Unit: mm) |           |     |
|----------------------------------|-----------|-----|
|                                  | A         | C   |
| Lead 12                          | 0.5kg 407 | 408 |
| Lead 6                           | 1kg 204   | 204 |
| Lead 2                           | 1kg 223   | 223 |
| Lead 6                           | 2kg 107   | 107 |
| Lead 2                           | 2kg 118   | 118 |
| Lead 2                           | 4kg 53    | 53  |

## Static loading moment




| (Unit: N·m) |    |    |
|-------------|----|----|
| MY          | MP | MR |
| 16          | 19 | 17 |

## Controller

| Controller | Operation method    |
|------------|---------------------|
| TS-S2      | I/O point trace /   |
| TS-SH      | Remote command      |
| TS-SD      | Pulse train control |

Note. Distance from center of slider upper surface to conveyor center-of-gravity at a guide service life of 10,000 km (Service life is calculated for 400mm stroke models).

## SSC04

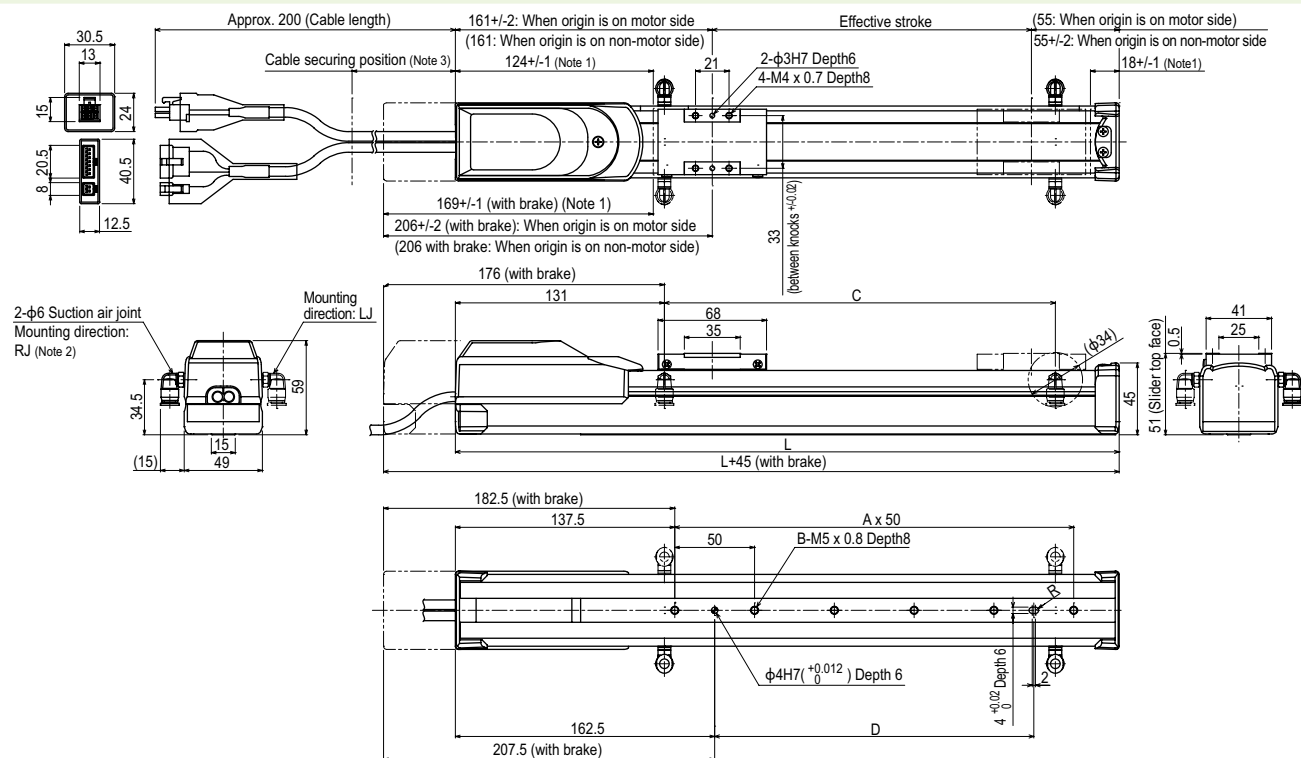

| Effective stroke | 50  | 100 | 150 | 200 | 250 | 300 | 350 | 400 |
|------------------|-----|-----|-----|-----|-----|-----|-----|-----|
| L                | 266 | 316 | 366 | 416 | 466 | 516 | 566 | 616 |
| A                | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   |
| B                | 3   | 4   | 5   | 6   | 7   | 8   | 9   | 10  |
| C                | 50  | 100 | 150 | 200 | 250 | 300 | 350 | 400 |
| Weight (kg)      | 1.5 | 1.6 | 1.7 | 1.8 | 2.0 | 2.1 | 2.2 | 2.3 |

Note 1. Stop positions are determined by the mechanical stoppers at both ends.

Note 2. Either right or left can be selected for the suction air joint mounting direction. This drawing shows the RJ (standard) direction.

Note 3. Secure the cable with a tie-band 100mm or less from unit's end face to prevent the cable from being subjected to excessive loads.

Note 4. The cable's minimum bend radius is R30.

Note 5. These are the weights without a brake. The weights are 0.2kg heavier when equipped with a brake.