Standard type: Large type

Arm length 900mm
Maximum payload 20kg

■ Ordering method

YK900XG

Z axis stroke - Tool flange 200: 200mm No entry: None 400: 400mm F: With tool flange

**RCX340-4** Cable

■ Controller

Specify various controller setting items. RCX340 ▶ **P.566** 

■ Specifications						
			X-axis	Y-axis	Z-axis	R-axis
Axis	Arm length		500 mm	400 mm	200 mm 400 mm	-
specifications	Rotation angle		+/-130 °	+/-150 °	-	+/-360 °
AC servo motor output			750 W	400 W	400 W	200 W
Deceleration mechanism	Transmission	Motor to speed reducer	Direct-coupled			
	method	Speed reducer to output	Direct-coupled			
Repeatability Note 1			+/-0.02 mm		+/-0.01 mm	+/-0.004 °
Maximum speed			9.9 m/sec 2.3 m/sec 1.7 m/sec 9		920 °/sec	
Maximum payload			20 kg (Standard type), 19 kg (Tool flange mount type)			
Standard cycle time: with 2kg payload Note 2			0.49 sec			
R-axis tolerable moment of inertia Note 3			1.0 kgm <sup>2</sup>			
User wiring			0.2 sq × 20 wires			
User tubing (Outer diameter)			ф 6 × 3			
Travel limit			1.Soft limit 2.Mechanical stopper (X,Y,Z axis)			
Robot cable length			Standard: 3.5 m Option: 5 m, 10 m			
Weight			Z axis 200 mm: 54 kg Z axis 400 mm: 56 kg			

3L: 3.5m

Controller | Power capacity (VA) | Operation method Programming / I/O point trace / Remote command / RCX340 2500 Operation using RS-232C communication

Note. The movement range can be limited by changing the positions of X and Y axis mechanical stoppers. (The movement range is set to the maximum at the time of shipment.)

See our robot manuals (installation manuals) for detailed information.

Note. To set the standard coordinates with high accuracy, use a standard coordinate setting jig (option). Refer to the user's manual (installation manual) for more details.


> Our robot manuals (installation manuals) can be downloaded from our website at the address below: https://global.yamaha-motor.com/business/robot/

Note 1. This is the value at a constant ambient temperature. (X,Y axes)

Note 2. When reciprocating 300mm in horizontal and 25mm in vertical directions.

Note 3. The acceleration coefficient is set automatically in accordance with the tip weight and R-axis moment of inertia settings.

Note. Please consult YAMAHA when connecting other tubes and cables to the self-supporting machine harness.

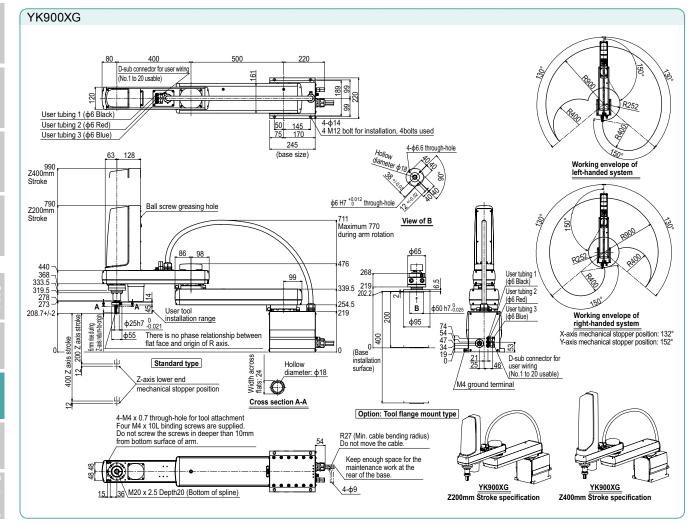

Controller